



PRODUCT LIST / 2022



YOUR FINGERPRINT IN LIGHTING

SLIM LED PANEL DOWNLIGHT

ECO SERIES



RECESSED MOUNTED CIRCLE



CODE	POWER	LUMEN	DIMENSIONS	CUT SIZE	PCS/PACK
2103	W 3	210 lm	Ø 85 H:20	Ø 73 mm	100
2106	W 6	420 lm	Ø 120 H:20	Ø 110 mm	100
2109	W 9	630 lm	Ø 145 H:20	Ø 135 mm	60
2112	W12	840 lm	Ø 174 H:20	Ø 160 mm	40
2115	W15	1050lm	Ø200H:20	Ø 185 mm	40
2118	W18	1260lm	Ø 220H:20	Ø 205mm	20
2124	W24	1680lm	Ø300H:20	Ø 285mm	10

SURFACE MOUNTED CIRCLE



CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK
2306	6 W	420 lm	Ø 120 H:32 mm	60
2312	12W	840 lm	Ø 174 H:32 mm	40
2318	18W	1260lm	Ø 210 H:32 mm	20
2324	24W	1680lm	Ø 285 H:32 mm	10

SURFACE MOUNTED SQUARE



CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK
2406	6 W	420 lm	L/W:120 H:32 mm	60
2412	12 W	840 lm	L/W:174 H:32 mm	40
2418	18 W	1260lm	L/W:210 H:32 mm	20
2424	24W	1680lm	L/W:285 H:32 mm	10



2 YEARS
GUARANTEE



ALUMINUM
BODY



THIN
DESIGN



EASY
ASSEMBLY



IP 20
PROTECTION



SMD
LED



120 °
LIGHT ANGLE



CRI
70+
LUMINOUS
EFFICACY



ENERGY
SAVINGS

2 YOUR FINGERPRINT
IN LIGHTING



Turkey
Discover
the potential



SLIM LED PANEL DOWNLIGHT

PRO SERIES

With **Isolated** Driver

SAMSUNG LED
LM283B+ Inside



Warm White
3000K



Daylight
4000K



Cool White
6500K

RECESSED MOUNTED CIRCLE



CODE	POWER	LUMEN	DIMENSIONS	CUT SIZE	PCS/PACK
1103	3 W	210 lm	Ø 85 H:20	Ø 73mm	100
1106	6 W	420 lm	Ø 120 H:22	Ø 110mm	100
1109	9 W	630 lm	Ø 145 H:22	Ø 130mm	60
1112	12 W	840 lm	Ø 174 H:22	Ø 160mm	40
1115	15 W	1050 lm	Ø 200 H:22	Ø 185mm	40
1118	18 W	1260 lm	Ø 225 H:24	Ø 208mm	20
1124	24 W	1680 lm	Ø 300 H:24	Ø 280mm	10

RECESSED MOUNTED SQUARE



CODE	POWER	LUMEN	DIMENSIONS	CUT SIZE	PCS/PACK
1203	3 W	210 lm	L/W:85 H:24	75x75mm	100
1206	6 W	420 lm	L/W:120 H:24	107x107mm	100
1209	9 W	630 lm	L/W:145 H:24	135x135mm	60
1212	12 W	840 lm	L/W:174 H:24	155x155mm	40
1215	15 W	1050lm	L/W:200 H:24	185x185mm	40
1218	18 W	1260lm	L/W:225 H:24	205x205mm	20
1224	24 W	1680lm	L/W:300 H:24	290x290mm	10

SURFACE MOUNTED CIRCLE



CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK
1306	6 W	420 lm	Ø 120 H:40 mm	60
1312	12 W	840 lm	Ø 174 H:40 mm	40
1318	18 W	1260 lm	Ø 225 H:40 mm	20
1324	24 W	1680 lm	Ø 300 H:40 mm	10

SURFACE MOUNTED SQUARE



CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK
1406	6 W	420 lm	L/W:120 H:40 mm	60
1412	12 W	840 lm	L/W:174 H:40 mm	40
1418	18 W	1260 lm	L/W:225 H:40 mm	20
1424	24 W	1680 lm	L/W:300 H:40 mm	10



RECESSED / SURFACE MOUNTED MOTION SENSOR

SAMSUNG LED
LM283B+ Inside

STRUCTURE

Body Electrostatic Powder Coated Aluminum Injection

Body Type Circle

Optic High Transmittance Opal PS/Diffuser/LGP

Lifespan 50.000 Hours

Body Color White - RAL 9003

Protection IP20

ELECTRIC

Input Voltage 220-240 VAC

Output Voltage 24-68 VDC

Frekans 50/60 Hz

Power Fac. $\geq 0.9 \cos$

SENSOR

Working Distance: 4-6m

Working Angle: 110°

Delay Time: 40 ± 10sec

LIGHT

Light Source 2835 LED

Colour Temp. 3000K/4000K/6500K

Colour Rendering ≥ 80 CRI

Luminous Efficacy ≥ 70 lm/W



2 YEARS
GUARANTEE



ALUMINYUM
BODY



THIN
DESIGN



EASY
ASSEMBLY



PIR
SENSOR



IP 20
PROTECTION



SMD
LED



120 °
LIGHT ANGLE



LUMINOUS
EFFICACY



ENERGY
SAVINGS

MOTION SENSOR

CODE	TYPE	POWER	LUMEN	DIMENSIONS	CUT SIZE	PCS/PACK
2518	RECESSED	18W	1260lm	Ø 225 H:22 mm	Ø 210 mm	20
2618	SURFACE	18W	1260lm	Ø 215 H:32 mm	-	20




SURFACE MOUNTED MONOLITHIC BACKLIGHT

SAMSUNG LED
LM283B+ Inside

STRUCTURE

- Body** High Reflective Electrostatic Powder Coated Sheet Metal
- Thickness** 0.25 mm
- Frame** Electrostatic Painted Monolithic Aluminum Profile
- Optic** High Transmittance Opal PS / 1 mm
- Lifespan** 50.000 Hours
- Body Color** White - RAL 9003
- Protection** IP20

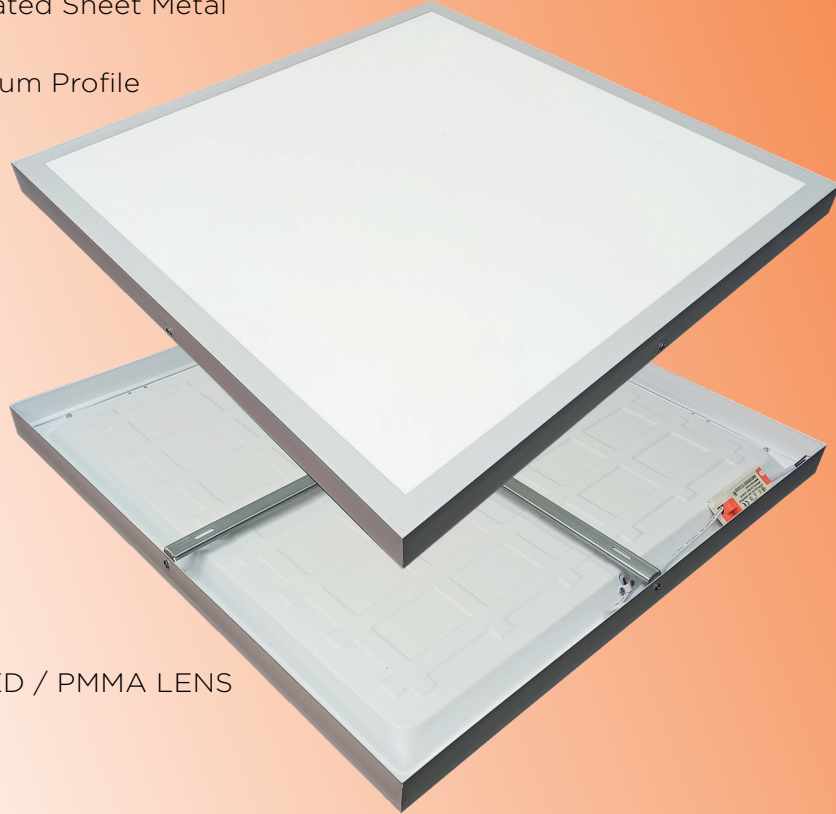

ELECTRIC

- Input Voltage** 220-240 VAC
- Frekans** 50/60 Hz
- Power Fac.** $\geq 0.5 \cos$

LIGHT

- Light Source** Samsung LM283B+ 2835 SMD LED / PMMA LENS
- Colour Temp.** 3000K/4000K/6500K
- Colour Rendering** ≥ 80 CRI
- Luminous Efficacy** ≥ 100 lm/W

								
2 YEARS GUARANTEE	ALUMINUM FRAME	THIN DESIGN	EASY ASSEMBLY	IP 20 PROTECTION	SMD LED	120 ° LIGHT ANGLE	CRI 80+ LUMINOUS EFFICACY	ENERGY SAVINGS

SURFACE MOUNTED

CODE	TYPE	POWER	LUMEN	DIMENSIONS	PCS/PACK	PACKAGE WEIGHT
5318	30X30	18W	1440 lm	300x300 H:45 mm	10	7,10 Kg
5330	30X60	30W	2400 lm	300x600 H:45 mm	5	6,35 Kg
5345	30X120	45W	3600 lm	300x1200 H:45 mm	5	12,5 Kg
5348	60X60	48W	3840 lm	600x600 H:45 mm	8	17,5 Kg
5390	60X120	90W	7200 lm	600x1200 H:45 mm	3	17,10 Kg



SLIM / CLIP-IN

SLIM BACKLIGHT

SAMSUNG LED
LM283B+ Inside

STRUCTURE


- Body** High Reflective Electrostatic Powder Coated Sheet Metal
- Thickness** 0.25 mm
- Frame** Electrostatic Painted Aluminum Profile
- Optic** High Light Transmittance Opal PS / 1 mm
- Lifespan** 50.000 Hours
- Body Color** White - RAL 9003
- Protection** IP20

ELECTRIC

- Input Voltage** 220-240 VAC
- Frekans** 50/60 Hz
- Power Fac.** $\geq 0.5 \cos$

LIGHT

- Light Source** Samsung LM283B+ 2835 SMD LED / PMMA LENS
- Colour Temp.** 3000K/4000K/6500K
- Colour Rendering** ≥ 80 CRI
- Luminous Efficacy** ≥ 100 lm/W

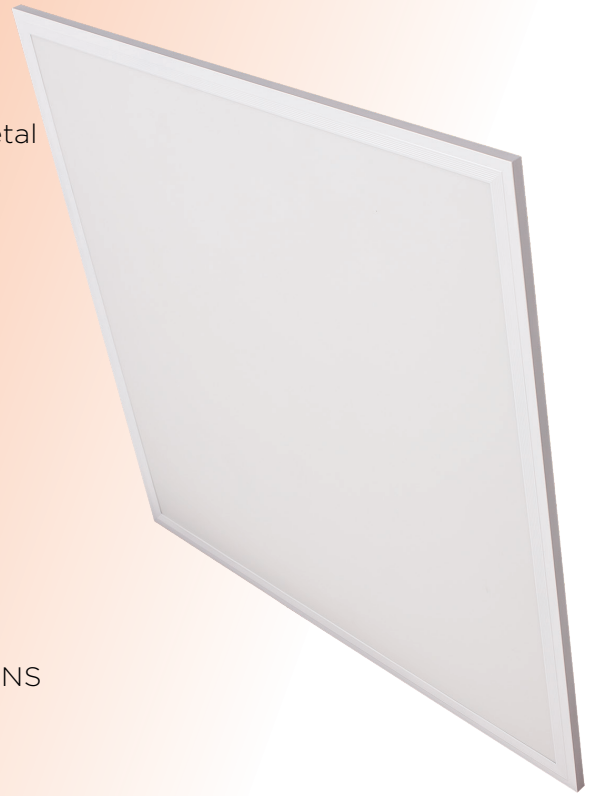

2 YEARS GUARANTEE	ALUMINUM FRAME	THIN DESIGN	EASY ASSEMBLY	IP 20 PROTECTION	SMD LED	120° LIGHT ANGLE	CRI 80+ LUMINOUS EFFICACY	ENERGY SAVINGS

SLIM

CODE	TYPE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
5118	30X30	18W	1440 lm	295x295x32 mm	10	6,50 Kg
5130	30X60	30W	2400 lm	295x595x32 mm	10	10,65 Kg
5145	30X120	45W	3600 lm	295x1195x32 mm	5	10,57 Kg
5148	60X60	48W	3840 lm	595x595x32 mm	10	15,33 Kg
5190	60X120	90W	9720 lm	595x1195x32 mm	5	15,90 Kg

CLIP-IN

CODE	TYPE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
5218	30X30	18W	1440 lm	300x300x32 mm	10	6,50 Kg
5230	30X60	30W	2400 lm	300x600x32 mm	10	10,65 Kg
5245	30X120	45W	3600 lm	300x1200x32 mm	5	10,57 Kg
5248	60X60	48W	3840 lm	600x600x32 mm	10	15,33 Kg
5290	60X120	90W	9720 lm	600x1200x32 mm	5	15,90 Kg



PMMA LENSED

LUMINAIRES

GLOP

SAMSUNG LED
LM283B+ Inside

STRUCTURE

Body High Reflective Electrostatic Powder Coated Sheet Metal

Thickness 1 mm

Optic High Light Transmittance PVC

Lifespan 50.000 Hours

Body Color White - RAL 9003

Protection IP20



ELECTRIC

Input Voltage 220-240 VAC

Frekans 50/60 Hz

Power Fac. ≥0.5 cos


LIGHT

Light Source Samsung 2835 SMD LED / PMMA LENS

Colour Temp. 3000K/4000K/6500K

Colour Rendering ≥80 CRI

Luminous Efficacy ≥80 lm/W

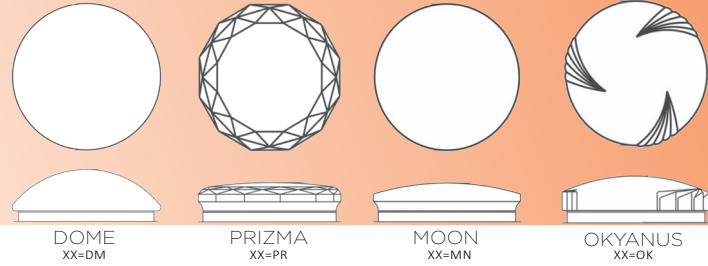

DOME
XX-DM

PRIZMA
XX-PR

MOON
XX-MN

OKYANUS
XX-OK



2 YEARS
GUARANTEE



THIN
DESIGN



EASY
ASSEMBLY



IP 20
PROTECTION



SMD
LED



120 °
LIGHT ANGLE



360°
SENSOR
MICROWAVE



CRI
80+
LUMINOUS
EFFICACY



90
ENERGY
SAVINGS

PRIZMA - MOON - OKYANUS

CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
6X12	12 W	840 lm	Ø 258 x H 57 mm	10	5,58 Kg
6X18	18 W	1260 lm	Ø 335 x H 60 mm	10	7,49 Kg
6X28	28 W	1960 lm	Ø 387 x H 58 mm	10	13,80 Kg

DOME

6412	12 W	840 lm	Ø 278 x H 105 mm	10	4,52 Kg
6418	18 W	1260 lm	Ø 355 x H 105 mm	10	6,25 Kg
6428	28 W	1960 lm	Ø 395 x H 117 mm	10	8,21 Kg

MICROWAVE WITH SENSOR

6618	18 W	1260 lm	Ø 335 x H 60 mm	10	7,49 Kg
------	------	---------	-----------------	----	---------



SLIM LED

DOB PROJEKTOR

SAMSUNG LED
LM283B+ Inside


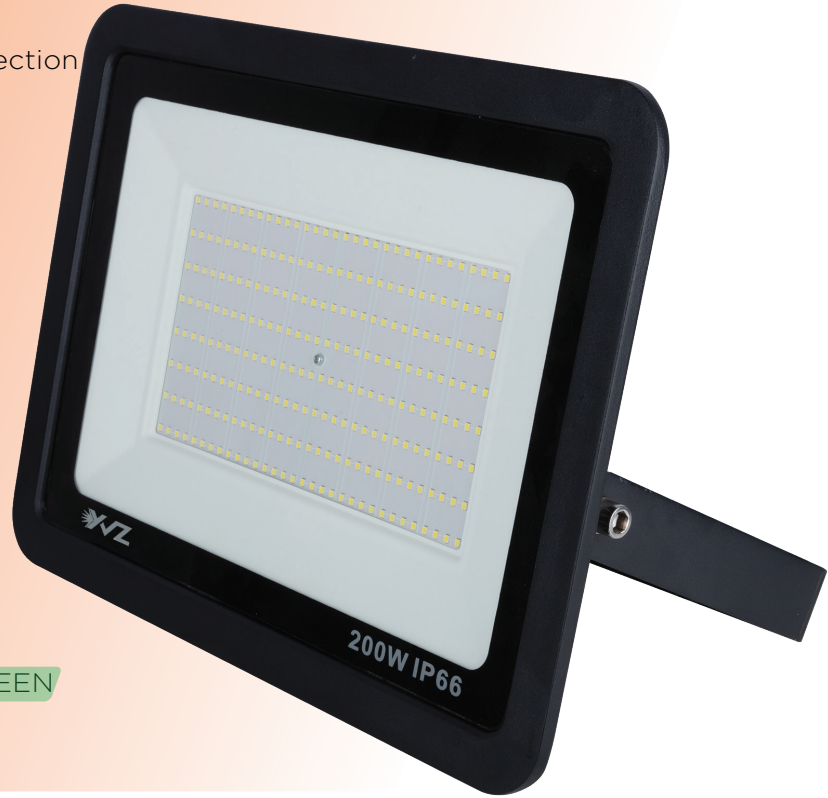
STRUCTURE

Body Electrostatic Powder Coated Aluminum Injection**Optic** Tempered Glass**Lifespan** 50.000 Hours**Body Color** Black - RAL 9005**Protection** IP20

ELECTRIC

Input Voltage 220-240 VAC**Frekans** 50/60 Hz**Power Fac.** $\geq 0.5 \cos$

LIGHT

Light Source 2835 LED**Colour Temp.** 3000K/4000K/6500K -  GREEN**Colour Rendering** ≥ 80 CRI**Luminous Efficacy** ≥ 80 lm/W2 YEARS
GUARANTEEALUMINYUM
BODYTHIN
DESIGNEASY
ASSEMBLYIP 66
PROTECTIONDOB
LED120°
LIGHT ANGLELUMINOUS
EFFICACYENERGY
SAVINGS

DOB PROJECTOR

CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
7101	10 W	800lm	125x110x30mm	30	6,20 Kg
7103	30 W	2.400lm	165x145x30mm	16	6,62 Kg
7105	50 W	4.000lm	210x173x35mm	20	14,66 Kg
7110	100 W	8.000lm	270x212x36mm	10	14,14 Kg
7115	150 W	12.000lm	330x245x30mm	4	12,66 Kg
7120	200W	16.000lm	390x280x50mm	4	12,66 Kg
7130	300W	24.000lm	450x345x50mm	3	13,49 Kg



SLIM LED - WITH SENSOR

DOB PROJJEKTOR

SAMSUNG LED
LM283B+ Inside

STRUCTURE

Body Electrostatic Powder Coated Aluminum Injection**Optic** Tempered Glass**Lifespan** 50.000 Hours**Body Color** Black - RAL 9005**Protection** IP20

ELECTRIC

Input Voltage 220-240 VAC**Frekans** 50/60 Hz**Power Fac.** $\geq 0.5 \cos$

SENSOR

Working Distance: 4-6m**Working Angle:** 110°**Delay Time:** 40 ± 10sec

LIGHT

Light Source 2835 LED**Colour Temp.** 3000K/4000K/6500K**Colour Rendering** ≥ 80 CRI**Luminous Efficacy** ≥ 80 lm/W

WITH SENSOR DOB PROJECTOR

CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
7201	10 W	800 lm	125x110x30mm	30	6,20 Kg
7203	30 W	2.400 lm	165x145x30mm	16	6,62 Kg
7205	50 W	4.000 lm	210x173x35mm	20	14,66 Kg
7210	100 W	8.000 lm	275x220x40mm	10	14,14 Kg

GARDEN LIGHTING PROJECTOR



CODE	POWER	LUMEN	DIMENSIONS
7301	10 W	800 lm	125x110x30mm
7303	30 W	2.400 lm	165x145x30mm



HORIZONTAL TYPE

BAND LUMINAIRES

STRUCTURE

Body High Reflective Coated Sheet Metal**Thickness** 0,25 mm**Optic** Opal Ps Difuzor**Lifespan** 50.000 Hours**Body Color** White - RAL 9003**Protection** IP20

ELECTRIC

Input Voltage 220-240 VAC**Frekans** 50/60 Hz**Power Fac.** $\geq 0.5 \cos$ 

LIGHT

Light Source 2835 LED**Colour Temp.** 3000K/4000K/6500K**Colour Rendering** ≥ 70 CRI**Luminous Efficacy** ≥ 90 lm/W2 YEARS
GUARANTEETHIN
DESIGNEASY
ASSEMBLYIP 20
PROTECTIONSMD
LED120 °
LIGHT ANGLELUMINOUS
EFFICACYENERGY
SAVINGS

BAND LUMINAIRES


CODE	POWER	LUMEN	DIMENSIONS	PCS/PACK	WEIGHT
8118	18 W	1620 lm	602x75x26 mm	30	4,79 Kg
8136	36W	3240 lm	1203x75x26 mm	30	8,82 Kg



NOTES

Blank lined area for notes.



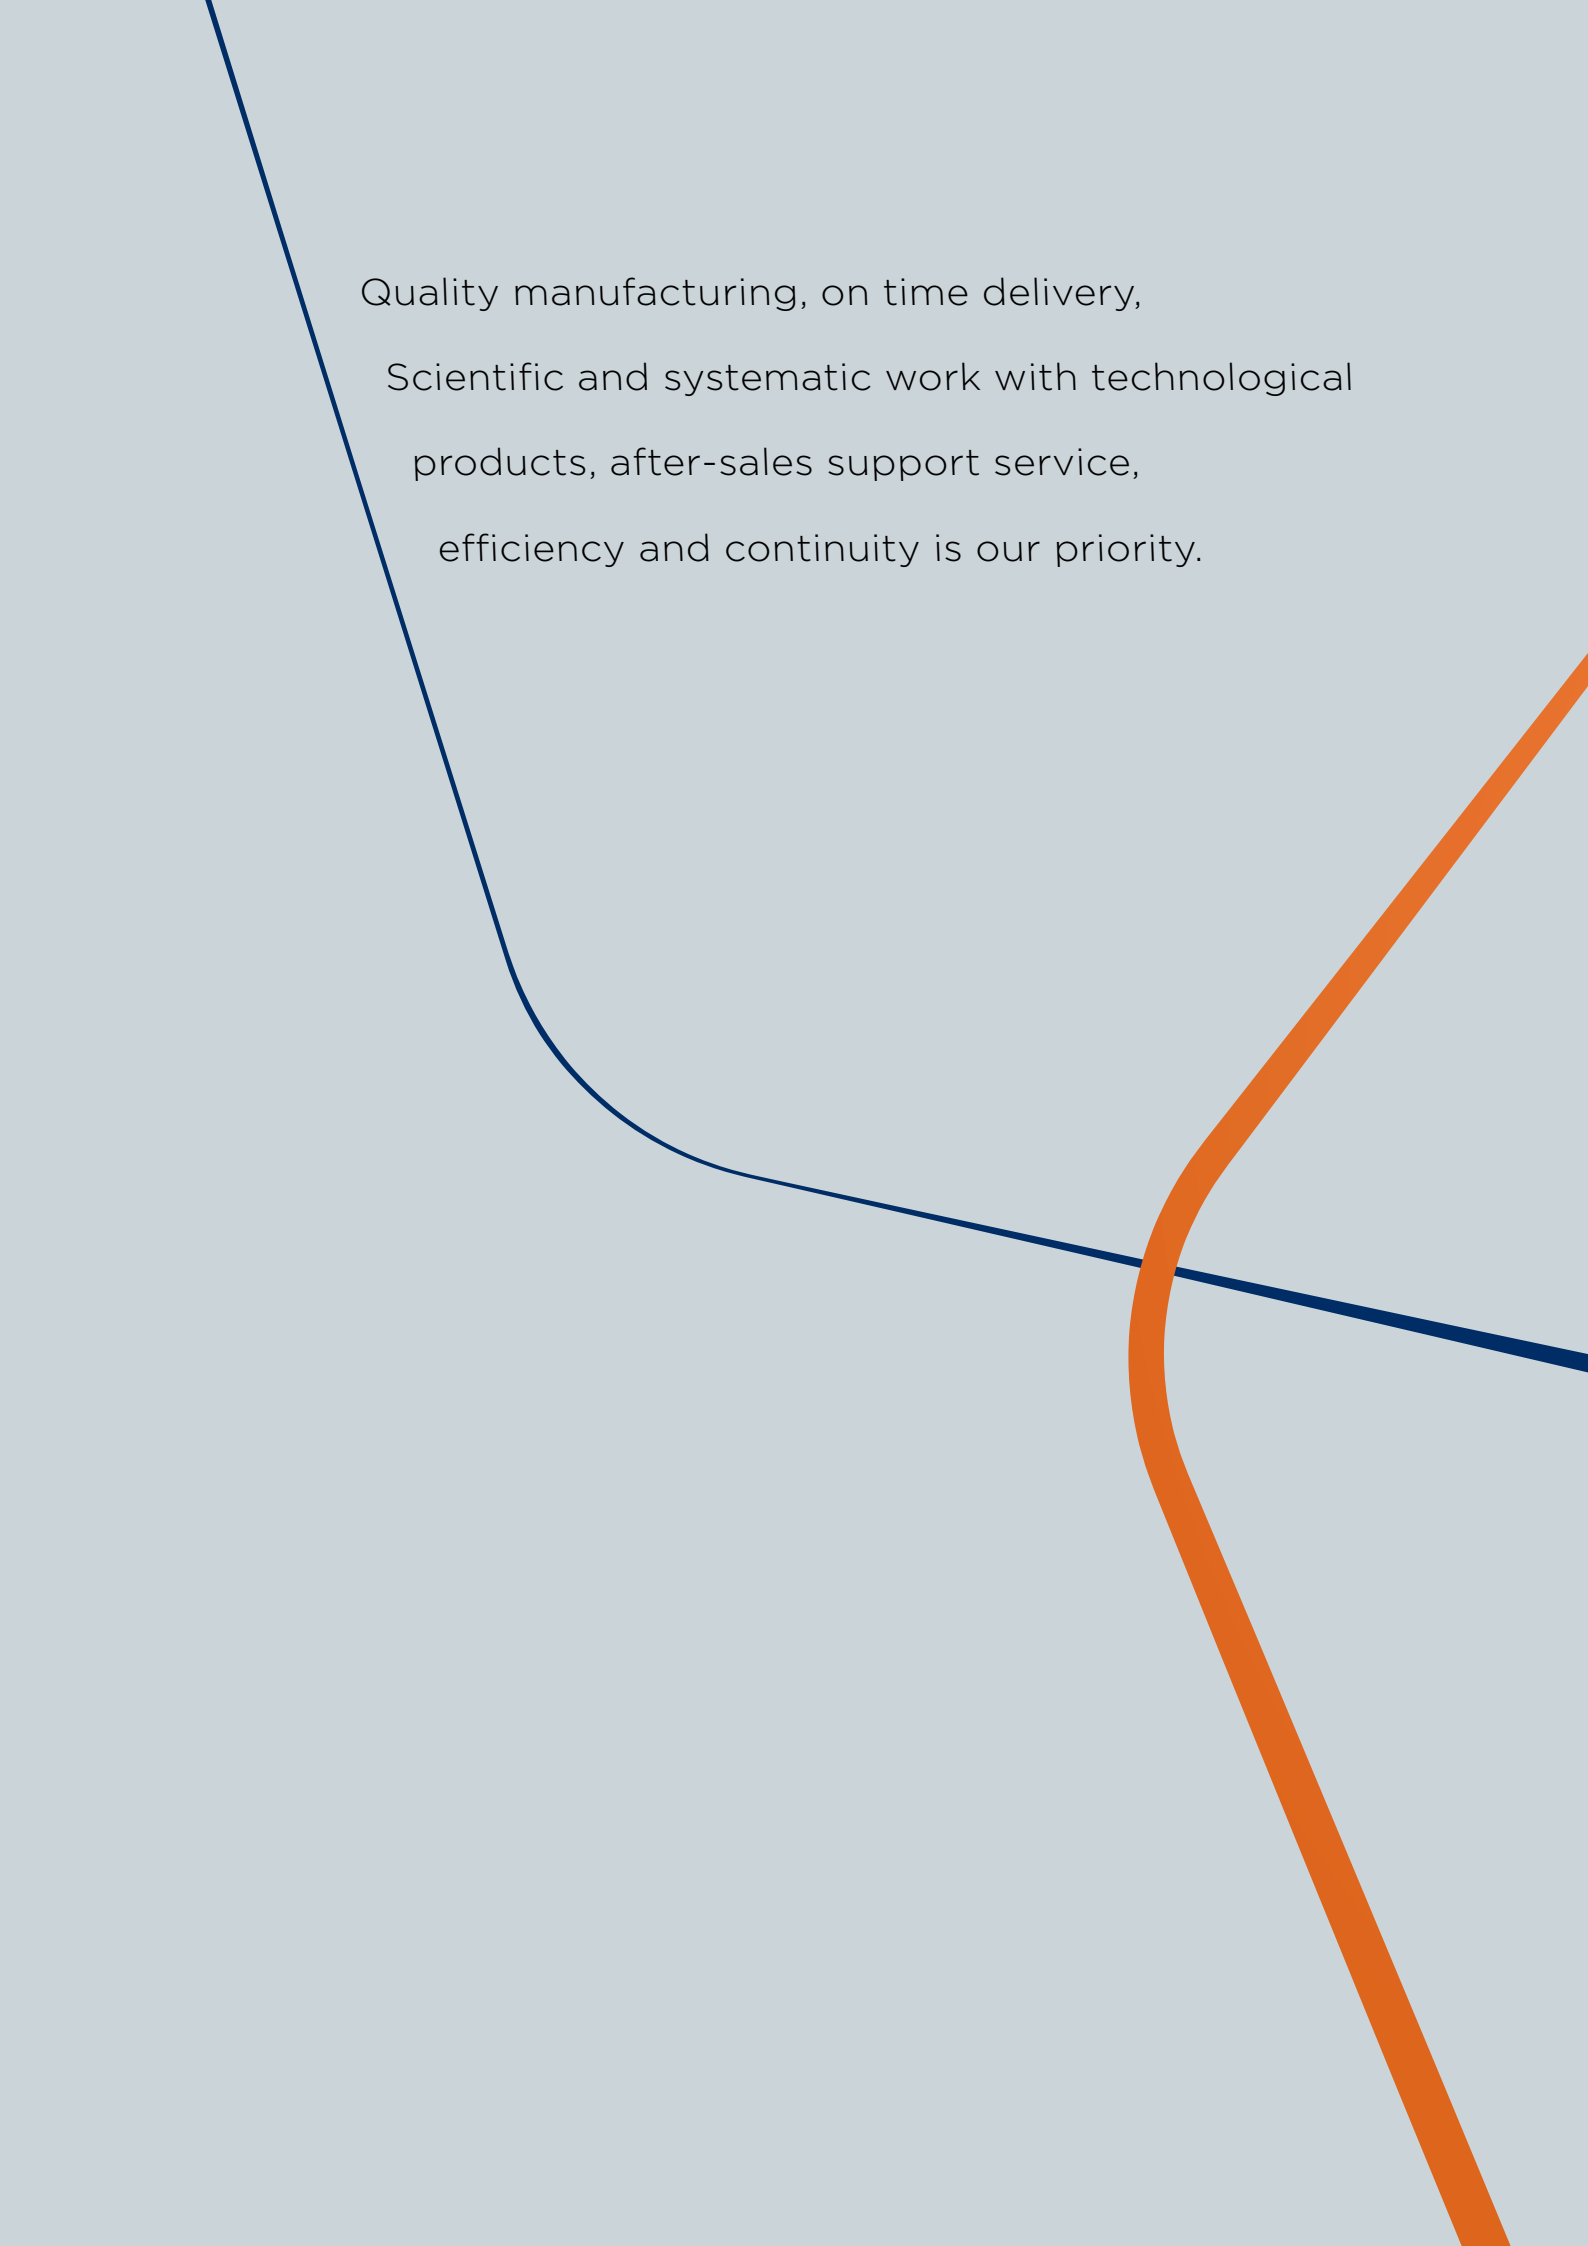

Quality manufacturing, on time delivery,
Scientific and systematic work with technological
products, after-sales support service,
efficiency and continuity is our priority.